

EXI Touch Panel (Dimming)



EX1



F1



Receiver

Manual

www.ltechonline.com

Technical Specs

EX1 Dimming Touch Panel

Input Voltage:	100~240Vac	Dimensions:	L86×W86×H37(mm)
Output Signal:	RF 2.4GHz, DMX512	Package Size:	L113×W112×H50(mm)
Working Temp.:	-30°C~55°C	Weight[G.W.]:	225g

F4-3A CV Receiver

Input Voltage:	5~24Vdc	Working Temp.:	-30°C~55°C
Max Current Load:	3A × 4CH Max. 12A	Dimensions:	L125×W33×H20(mm)
Max Output Power:	60W/144W/288W(5V/12V/24V)	Package Size:	L127×W35×H24(mm)
Wireless Signal:	2.4GHz	Weight[G.W.]:	60g

F4-5A CV Receiver

Input Voltage:	5~24Vdc	Working Temp.:	-30°C~55°C
Max Current Load:	5A × 4CH Max. 20A	Dimensions:	L175×W44×H30(mm)
Max Output Power:	100W/240W/480W(5V/12V/24V)	Package Size:	L178×W48×H33(mm)
Wireless Signal:	2.4GHz	Weight[G.W.]:	150g

F4-CC CC Receiver




Input Voltage:	12~48Vdc	Working Temp.:	-30°C~55°C
Output Voltage:	3~46Vdc	Dimensions:	L175×W44×H30(mm)
Output Current:	CC 350/700/1050mA×4CH	Package Size:	L178×W48×H33(mm)
Output Power:	1.05W~48.3W×4CH Max 193.2W	Weight[G.W.]:	165g
Wireless Signal:	2.4GHz		

Note: Receiver is sold separately.




Product Size:

LTECH

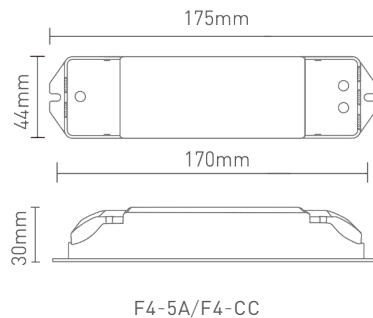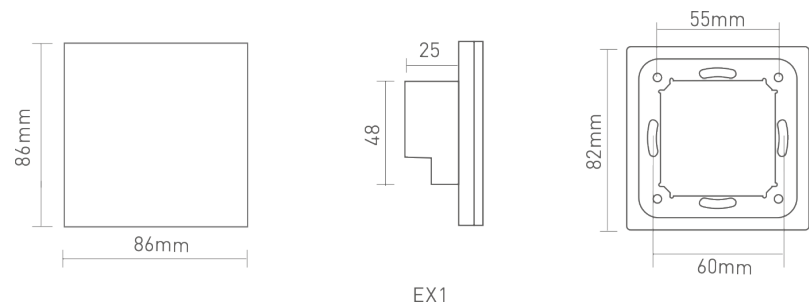


Key Functions:

LTECH

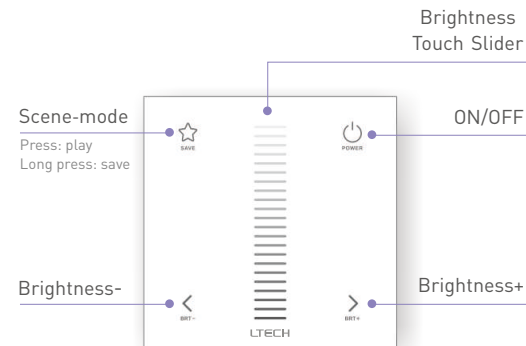


- * When the touch panel is off, Long press  to turn on/off the buzzer
When the touch panel is on, Long press  to match code.

Terminals:




Installation Instruction:


LTECH

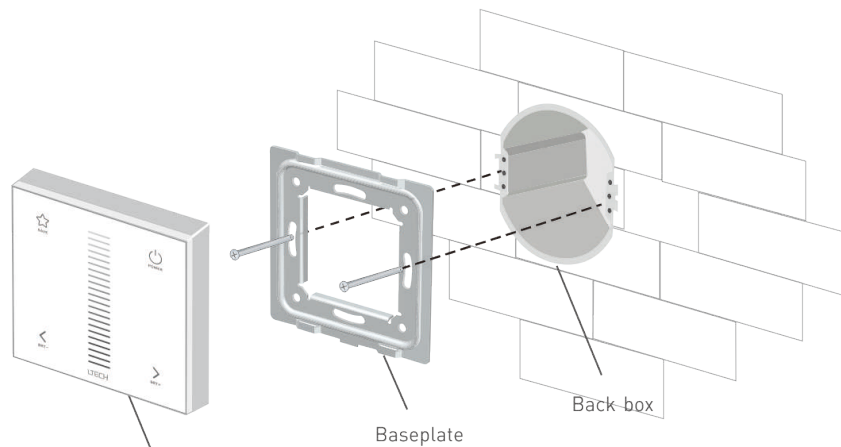


Typical back box as below:



Europ style




86 size

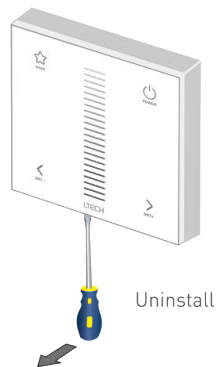


DMX Wiring:

LTECH

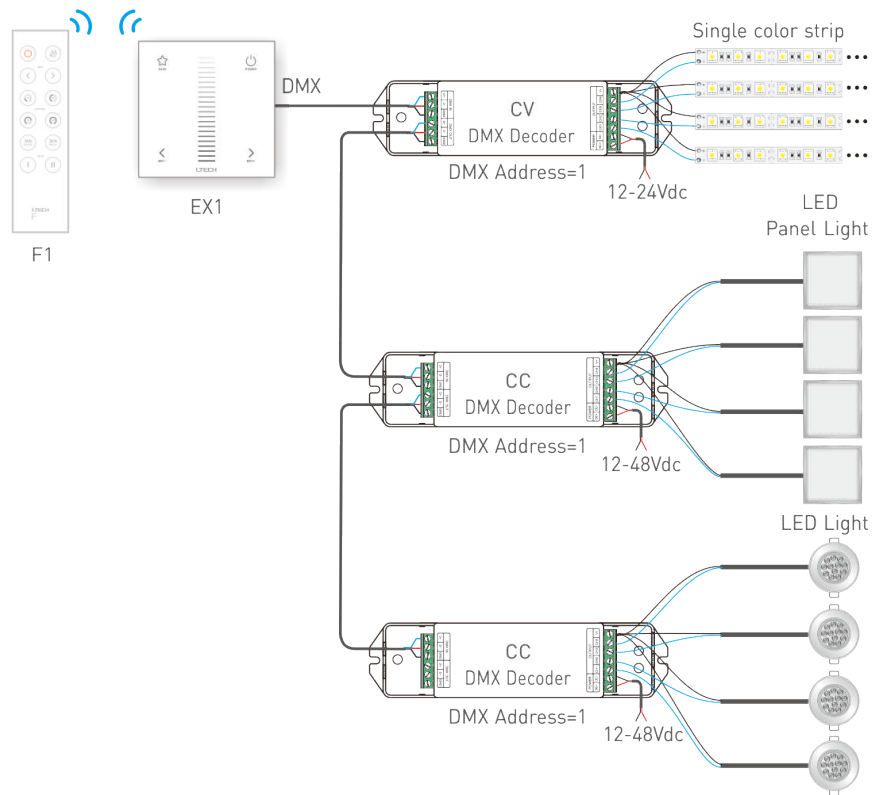


RF Wireless Wiring:

LTECH

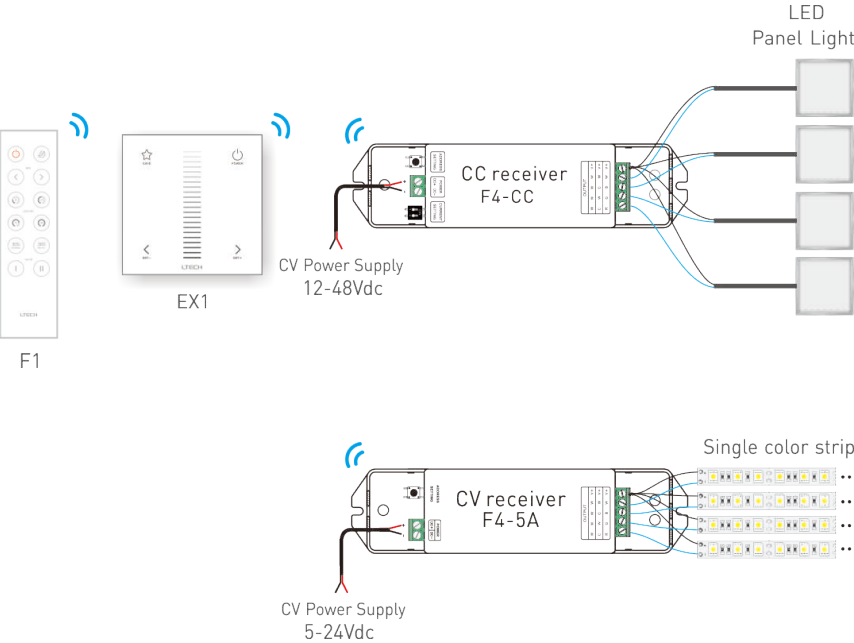

Multi-control Wiring:

LTECH

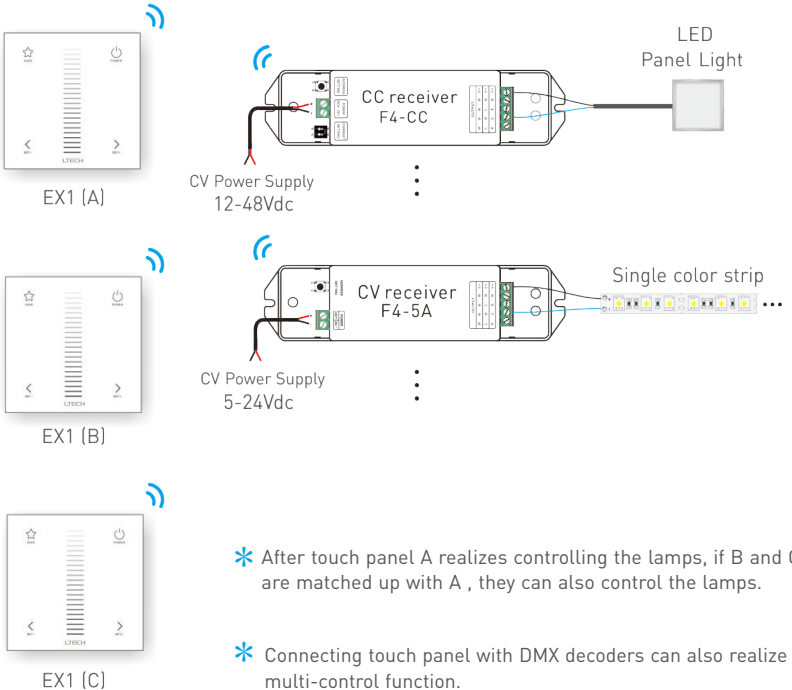

Match/Clear Code between Touch Panel & Receiver

LTECH

Match code:

Method 1 : When the touch panel is on and the wiring between the receiver and the lamps are correctly,

1.  Receiver
Power on the receiver, and complete step 2 within 10s.
2.  POWER
Long press  on the touch panel, the lamps begin flicker.
3.  5s
Touch the slider in 5s, the lamps stop flicking, match successfully.

Method 2 : When the touch panel is on and the wiring between the receiver and the lamps are correctly,


1.  Receiver
ID learning button
Short press "ID learning button" on the receiver.
2.  POWER
Long press  on the touch panel, the lamps begin flicker.
3.  5s
Touch the slider in 5s, the lamps stop flicking, match successfully.

Clear code:

Method 1: Power on and off the receiver continuously for 5 times, If the buzzer long beep and lamps flicker twice, deactivate the matching successfully.




Method 2: Long press "ID learning button" on receiver for 5 seconds, If the lamps flicker twice, deactivate the matching successfully.



Match/Clear Code between Remotes:

LTECH

Match code:

1.  A B
Assuming that B match up with A.
2.  B POWER
Long press  on the B, the indicator lights of 4 keys keep on after release.
3.  A
Touch the slider on A in 5s, when the indicator lights of B turn off, match successfully.

Clear code:

- 
- B
-
- Long press the two keys
- 
- 
- on the touch panel B simultaneously (about 3 seconds) until the indicator light flicker several times, deactivate the matching successfully.

Match/Clear Code between Touch Panel & Remote:

Match code:

1.  POWER
Long press  on the touch panel, the indicator light of the four keys flicker.
2.  POWER
Long press  on the remote, the indicator light stop flicking, match successfully.

Clear code:

- 
- B
-
- Long press the two keys
- 
- 
- on the touch panel simultaneously (about 3 second), if the indicator light flicker 3 times, deactivate.