

DIN-Rail LED Power Repeater

0...144W-288W 12A 12-24V

- Accept PWM control.
- LED lights would be twice as much by adding one more power repeater.
- Max. current output: 12A.
- Full protective plastic housing.
- DIN-Rail & Screw dual-use.
- Suitable for indoor environments.






Main Characteristics

Input Signal: CV/CC PWM
 Input Voltage: 12~24V DC
 Output Voltage: 12~24V DC
 Max. Current Load: 12A×1CH Max. 12A
 Max. Output Power: 0-144W...288W(12V/24V)


Mounting: DIN-Rail or Screw
 Working Temperature: -30℃~55℃
 Product Size: L112×W35×H67(mm)
 Package Size: L114×W37×H70(mm)
 Weight(G.W.): 120g

Dimensions

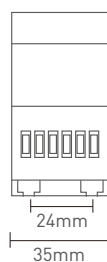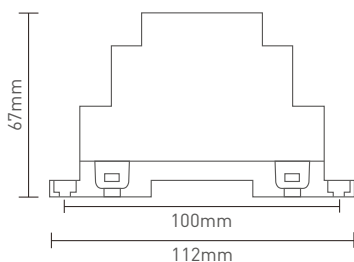


DIN-Rail mounting size:
TS-35/7.5 or TS-35/15

Terminal Description

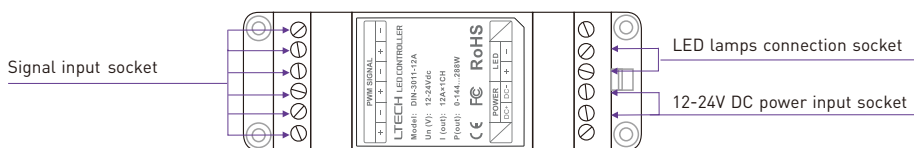

12V lamp connected, loads 1~144W(12V).

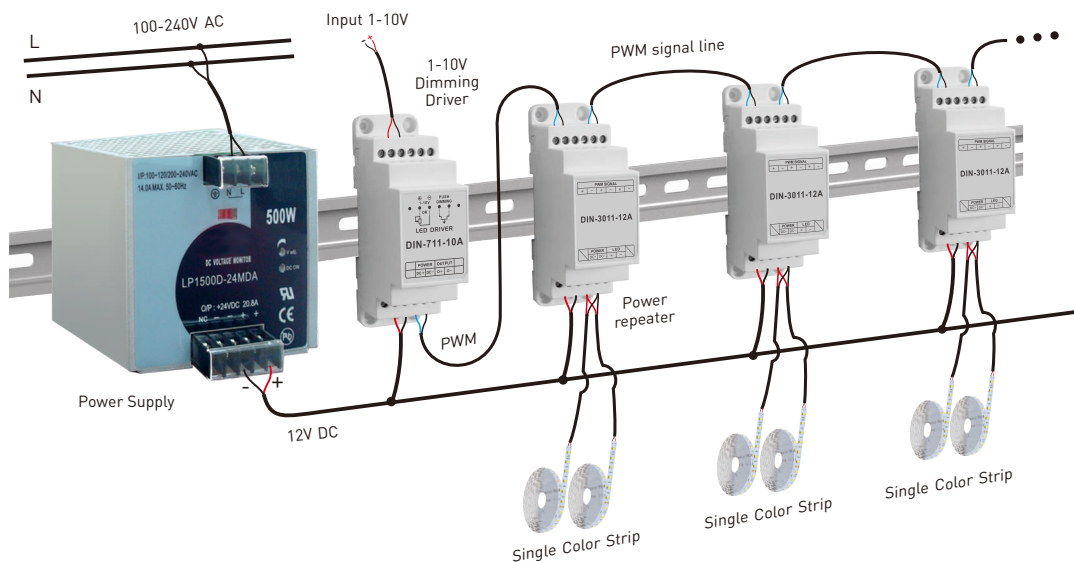

24V lamp connected, loads 1~288W(24V).

